


PRODUCT DESCRIPTION		
Color Index		Pigment Yellow 83
C.I. No.		21108
Chemical Type		Diarylide Yellow
CAS No.		5567-15-7
Hue Angle [1/3 SD]	71.6	DIN 5033
1/3 SD Reduction Ratio	1 : 4.3	DIN 5033
1/25 SD Reduction Ratio	1 : 73.6	DIN 5033

PHYSICAL DATA		
Appearance	yellow powder	
Density [g/cm ³]	1.5	DIN EN ISO 787-10
Bulk Volume [l/kg]	4.3	DIN EN ISO 787-11
Specific Surface [m ² /g]	20	DIN 66132
Oil Absorption [ml/100g]	58	DIN EN ISO 787-5

FASTNESS PROPERTIES				
Acid	5	DIN EN ISO 20105-A02		
Alkali	5	*		
Overpainting	5	**		
Water	4 - 5	DIN ISO 2836		
Butanol	4 - 5	DIN ISO 2836		
Butylacetate	4 - 5	DIN ISO 2836		
Xylene	4 - 5	DIN ISO 2836		
MEK	4	DIN ISO 2836		
White Spirits	4 - 5	DIN ISO 2836		
Heat Resistance [°C]	150	***		
Light Fastness		DIN EN ISO 105-B01		
Full Shade	1:1 TiO ₂	1/3 SD		
8	8	8		
Weather Fastness / Xeno		DIN EN ISO 20105-A02		
Full Shade	1:1 TiO ₂	1/3 SD	1/25 SD	
[1000h]	4	3	2 - 3	
[1600h]	-	-	-	
[3200h]	-	-	-	
[4800h]	-	-	-	

STANDARD PACKAGING
20kg Cardboard Boxes
Different types of packaging are available on request

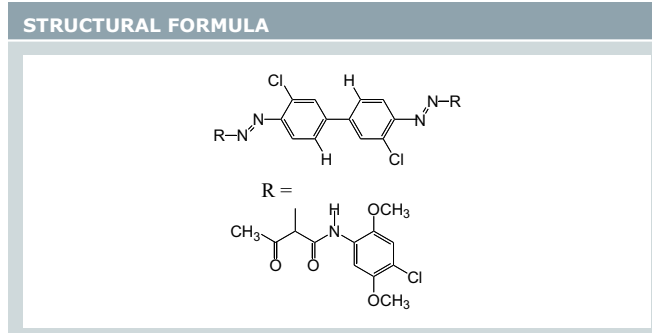

APPLICATION PROFILE	
Automotive Coatings	-
Industrial Coatings	recommended
Coil Coatings	-
Decorative Coatings	recommended

REGULATIONS	
Germany BfR recom. IX	compliant
APME AP 89/1	compliant
USA (FDA) 21 CFR § 178.3297	not listed
Toys Europe EN 71-3	compliant
Toys USA ASTM F 963-03	compliant
CONEG, EC 94/62	compliant
ROHS, 2002/95/E, 2005/618/EC	compliant
End of Life Vehicles, 2000/53/EC, 2002/525/EC	compliant

CHEMICAL INVENTORY LISTING STATUS
All ingredients are listed in the following national chemical inventories:
EINECS [Europe], TSCA [USA], DSL [Canada], AICS [Australia], NZIoC [New Zealand], MITI [Japan], ECL [Korea], IECSC [China], PICCS [Philippines]

* DIN EN ISO 20105-A02

** Pigments were tested in a 2C-acrylate system with 30 minutes baking time at 80°C.

*** Pigments were tested in a 2C-acrylate system.

® = Registered trademark of Heubach Colour Pvt. Ltd. Our product specifications and application information is based on our current knowledge. They are non-binding and cannot be taken as a guarantee. The processing company must establish the suitability of individual products itself. As their use lies beyond our knowledge and control, we cannot accept any liability relating to the use of our products in particular applications. In addition to that, the legal rights of third parties must always be considered. The specification agreed between the customer and ourselves is the basis upon which our general sales and delivery conditions are set and is the deciding factor concerning any liabilities. Our standard specification is then valid if no specification has been agreed upon between the customer and us.