

MONOLITE® RED 325401

ORGANIC PIGMENTS

BREAKING NEWS



MONOLITE® Red 325401 is a clean, medium shade opaque red pigment with very high light and weather fastness properties suitable for a wide range of coatings applications such as:

Water-borne Paints

Air-drying Alkyds

Stoving Enamels

Acid curing Systems

Amine curing Epoxies

Isocyanate cured Systems

Powder Coatings




Physical Data

Color Index	Pigment Red 254
Chemical Type	Diketopyrrolo-Pyrrole
Density [g/cm ³]	1.54
Specific Surface [m ² /g]	23.2

Fastness Properties

Acid	5
Alkali	5
Overpainting	5
Water	5
Butanol	4 - 5
Butylacetate	4 - 5
Xylene	5
MEK	4 - 5
White Spirits	5
Heat Resistance [°C]	200
Light Fastness [Full Shade]	8

Structural Formula

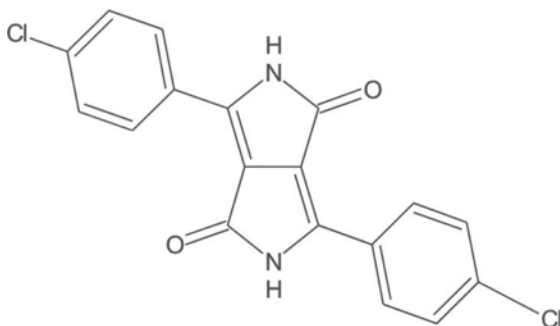

www.heubachcolor.de

® = Registered trademark of Heubach Colour Pvt. Ltd.

Our product specific and application information are based upon our current knowledge. They are non-binding and cannot be taken as a guarantee. The processing company must establish the suitability of individual products itself. As their use lies beyond our knowledge and control, we cannot accept any liability relating to the use of our products in particular applications. In addition to that, the legal rights of third parties must always be considered. The specification agreed between the customer and ourselves is the basis upon which our general sales and delivery conditions are set and is the deciding factor concerning any liabilities. Our standard specification is then valid if no specification has been agreed upon between the customer and ourselves.

heubach
COMPETENCE IN COLOR

Europe: Heubach GmbH · Heubachstraße 7 · 38685 Langelsheim · Deutschland

Tel 49-5326-52-0 · Fax 49-5326-52-213

USA: Heucotech Ltd. · 99 Newbold Road · Fairless Hills, PA 19030 · USA

Tel 1-800-HEUBACH · Fax 1-215-736-2249

Asien: Heubach Colour Pvt. Ltd. · 2nd Floor, Landmark-Building · Race Course Circle · Baroda 390 007 – Indien

Tel 91-265-2343-310 · Fax 91-265-2341-682

E-Mail: sales@heubachcolor.de