

PRODUCT DESCRIPTION		
Color Index	Pigment Green 7 / Pigment Green 36	
C.I. No.	74260 / 74265	
Chemical Type	Cu-Phthalocyanine Green, halogenated	
CAS No.	1328-53-6 / 68512-13-0	
Hue Angle [1/3 SD]	174.2	DIN 5033
1/3 SD Reduction Ratio	1 : 6.3	DIN 5033
1/25 SD Reduction Ratio	1 : 79.6	DIN 5033


PHYSICAL DATA		
Appearance	green powder	
Density [g/cm <sup>3</sup> ]	2.3	DIN EN ISO 787-10
Bulk Volume [l/kg]	2.3	DIN EN ISO 787-11
Specific Surface [m <sup>2</sup> /g]	45	DIN 66132
Oil Absorption [ml/100g]	38	DIN EN ISO 787-5

FASTNESS PROPERTIES				
Acid	5	DIN EN ISO 20105-A02		
Alkali	5	*		
Overpainting	5	**		
Water	5	DIN ISO 2836		
Butanol	5	DIN ISO 2836		
Butylacetate	5	DIN ISO 2836		
Xylene	5	DIN ISO 2836		
MEK	5	DIN ISO 2836		
White Spirits	5	DIN ISO 2836		
Heat Resistance [°C]	180	***		
Light Fastness	DIN EN ISO 105-B01			
Full Shade	8			
1:1 TiO <sub>2</sub>	8			
1/3 SD	8			
Weather Fastness / Xeno	DIN EN ISO 20105-A02			
	Full Shade	1:1 TiO <sub>2</sub>	1/3 SD	1/25 SD
[1000h]	5	5	5	-
[1600h]	-	-	-	-
[3200h]	-	-	-	-
[4800h]	-	-	-	-

\* DIN EN ISO 20105-A02

\*\* Pigments were tested in an alkyd / melamine system with 30 minutes baking time at 160°C.

\*\*\* Pigments were tested in an alkyd / melamine system.

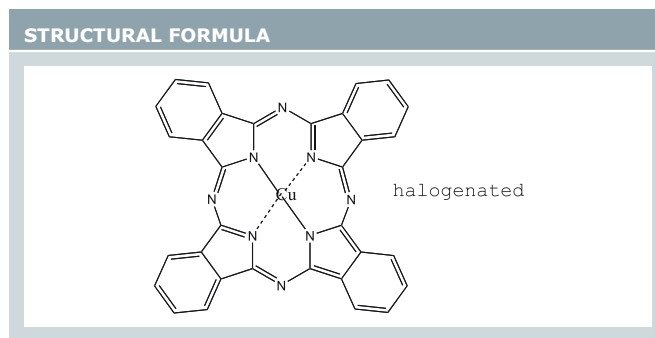

APPLICATION PROFILE	
Automotive Coatings	recommended
Industrial Coatings	recommended
Coil Coatings	recommended
Powder Coatings	-
Decorative Coatings	recommended

REGULATIONS	
Germany BfR recom. IX	compliant
APME AP 89/1	compliant
USA (FDA) 21 CFR § 178.3297	-
Toys Europe EN 71-3	compliant
Toys USA ASTM F 963-03	compliant
CONEG, EC 94/62	compliant
ROHS, 2002/95/E, 2005/618/EC	compliant
End of Life Vehicles, 2000/53/EC, 2002/525/EC	compliant

STANDARD PACKAGING	
25kg Cardboard Boxes	
Different types of packaging are available on request	